




mmT-X

DIGITAL MICRO HARDNESS TESTERS



▶ MMT-X Feature

- The new function deploy, color LCD touch panel.
- The turret which mounted two indenter, four objective lenses.
- Testing area of industry maximum class.
- Wide test force range.
- Line up in LCD model.
- 0.01 μm measuring. (Magnification X200~X1000)
- LED light source.



MATSUZAWA

<http://www.matsuzawa-ht.com>

mmT-X


DIGITAL MICRO HARDNESS TESTERS

Operation Color LCD touch panel

Visibility and operativity improve by color LCD touch panel. Equipped with the assist function that can identify the most suitable measurement condition.

(Correspondence model: X3, X7)

HV testing mode (Vickers Hardness)



HK testing mode (Knoop Hardness)



※Knoop indenter(option) is required.

Light-load brinell mode



Ball indenter(option) is required.

Xbar mode




This mode can display the mean and difference immediately.

Fracture toughness KC testing mode.



Cylindrical correction mode :



This mode can set spherical surface and cylindrical correction.

Assist function



This mode can identify the testing condition which is optimum is carried. The testing condition which is optimum can be confirmed by satisfying 2 from 3 condition of thickness, hardness, test load.

Function

The turret which mounted two indenter, four objective lenses.



Two indenter and four objective lenses are realized following conventional stable loading mechanism. The measuring that reliability is high can be done in various test condition.

(All mode correspondence)

Measuring unit $0.01 \mu\text{m}$ was realized by corresponding to high magnification of measuring, total magnification $200\times - 1000\times$.

(Correspondence model: X3, X7)

Operation Line up in LCD model.

Clear specimen surface image magnified on TFT LCD monitor is displayed. Fatigue by the long operation is decreased. The integrated structure, there is no eye movement.

Because the Measurement knob is placed in the measurement panel, you can significantly reduce the fatigue of working long hours.

(Correspondence model: X3, X7)



Function

Testing area of industry maximum class.

By a new design, testing range of specimen height 120mm and specimen depth 160mm was secured.

(All mode correspondence)





MMT-X7

Digital model with auto turret.

Digital type

Min.scale : 0.01 μ m(200 \times ~1000 \times)

Min measuring unit : 0.01 μ m(200X~1000X)

Touch panel type / Turret : Auto

Data output type / Dwell time : 5~99sec

MMT-X3

Digital model with touch panel.

Digital type

Min.scale : 0.01 μ m(200 \times ~1000 \times)

Min measuring unit : 0.01 μ m (200X~1000X)

Touch panel type / Turret : Manual

Data output type / Dwell time : 5~99sec

MMT-X1

order made

Economy model of manual operation. Analog type

Specifications

Hardness Tester Model

Item / Model			MMT-X7			MMT-X3				MMT-X1					
Test force	Standard	Type A	49.03	98.07	245.2	490.3	980.7	1961	2942	4903	9807mN				
			5	10	25	50	100	200	300	500	1000gf				
	Option	Type B	9.807	29.42	49.03	98.07	245.2	490.3	980.7	1961	2942	4903	9807	19614	mN
			1	3	5	10	25	50	100	200	300	500	1000	2000	gf
Loading mechanism			Automatic loading and releasing method												
indenter approach speed			50 μ m/sec												
Dwell time			5~99sec						5~30sec						
Indenter			Standard:1(HV),Option:2(HV,HK)												
Objective lens			Standard:2(40X, 10X *in case of AMT-PS/FS series : 40X, 5X), Option: Max.4(5X~100X)												
Eyepiece lens			Standard10 \times option15 \times												
Total magnification			Standard(400X,100X) Corresponding50 \times ~1000 \times												
Measuring microscope (total 400 \times)	Max.measuring length		250 μ m												
	Min.scale		0.01 μ m(200 \times ~1000 \times)						0.5 μ m						
	Min.measuring unit		0.01 μ m(200 \times ~1000 \times)						0.1 μ m						
	Type		Electronic type						Mechanical type						
Light source			LED light source												
Turret			Auto			Manual									
LCD touch panel			Color LCD touch panel						-						
Testing mode			6 kinds of HV,HK,HBS,KC,Xbar,Cylindrical correction												
Data memory			999 data memory												
Hardness conversion			Possible in compliance with SAE(J-417B),ASTM(E-140)												
OK/NG criteria			Judging to the results by setting Max. and Min.												
Statistical caluation			Max.value,Min.value,dispersion(R),mean value,converted value.												
Max. height of specimen			120mm												
Max. depth of specimen			160mm												
Data output			①Centronics(Dot printer output)										-		
			②RS232C(Output for PC),Possible to change to printer output												
Accuracy			According to JIS B7725 and ASTM E-384												
Photo booth			The photo booth can be installed in the body tube in the upper part of the main body at any time.												
Dimensions and weight			Main body only W250 \times D520 \times H530mm 35kg												
Power supply			Single phase AC100V~240 50/60Hz available for Export models												

TV measuring device



TVL

The 10.4inch TFT LCD monitor is attached.
(All mode correspondence)

LCD model



LCD

The 10.4inch TFT LCD monitor is integrated.
(Correspondence model:X3,X7)

TV measuring device Set Model

Item / Model	MMT-X□-TVL
CCD camera	1/2"CCD camera
Monitor	10.4" TFT LCD
Monitor magnification	≒ 1200×
Min.scale	0.01μm
Data display	Display on touch panel ※1
Output	Monitor output(NTSC)


LCD integrated model

Item / Model	MMT-X□-LCD
CCD camera	1/3"CCD camera
Monitor	10.4" TFT LCD
Monitor magnification	≒ 1600×
Min.scale	0.1μm
Data display	Display on monitor/Display on touch panel
Output	Monitor output(RGB)

※Number of hardness tester is in a part of □ of a model name. LCD integrated model is only digital model.(X3,X7)


※1 X1 do not have a data display function.

Automatic System




**Automatic reading system
PMT series**

PC system of the automatic reading function deployment. In addition to automatic reading, data processing and operation of hardness testers* can be operated in the PC side.




**Automatic stage system
AMT-S series**

PC system of the automatic stage deployment. Excellent measurement by the stage control box in the operation can be done.



**Automatic stage-reading system
AMT-PS series**

PC system of the automatic reading and stage function deployment. Various measuring patterns can be set.



**Automatic stage-reading-focus system
AMT-FS series**

PC system of the reading, automatic stage, auto focus. Serial operation of position move - Loading - auto focus - auto reading are done in all automatic.

Automatic focus

※Hardness tester models that can control is the only digital models.


Automatic System

Item / Model	PMT-X□	AMT-X□S	AMT-X□PS	AMT-X□FS
Correspondence model	X1, X3, X7	X3, X7	X3, X7	X7
Auto reading	○	—	○	○
Data processing	○	○	○	○
Auto stage	—	○	○	○
Auto focus	—	—	—	○
Stage control box	—	○	○	○
PC	PC/AT convertible			
Monitor	19" TFT monitor			
OS	Windows XP professional SP3(Corresponding windows7 in the future.)			
Other	X-Y data input option	Corresponding exclusive fully automatic system ※please consult		

※Number of hardness tester is in a part of □ of a model name. Please use an exclusive catalog on the details.

※Windows is a registered trademark by Microsoft USA in USA and other countries.

Option

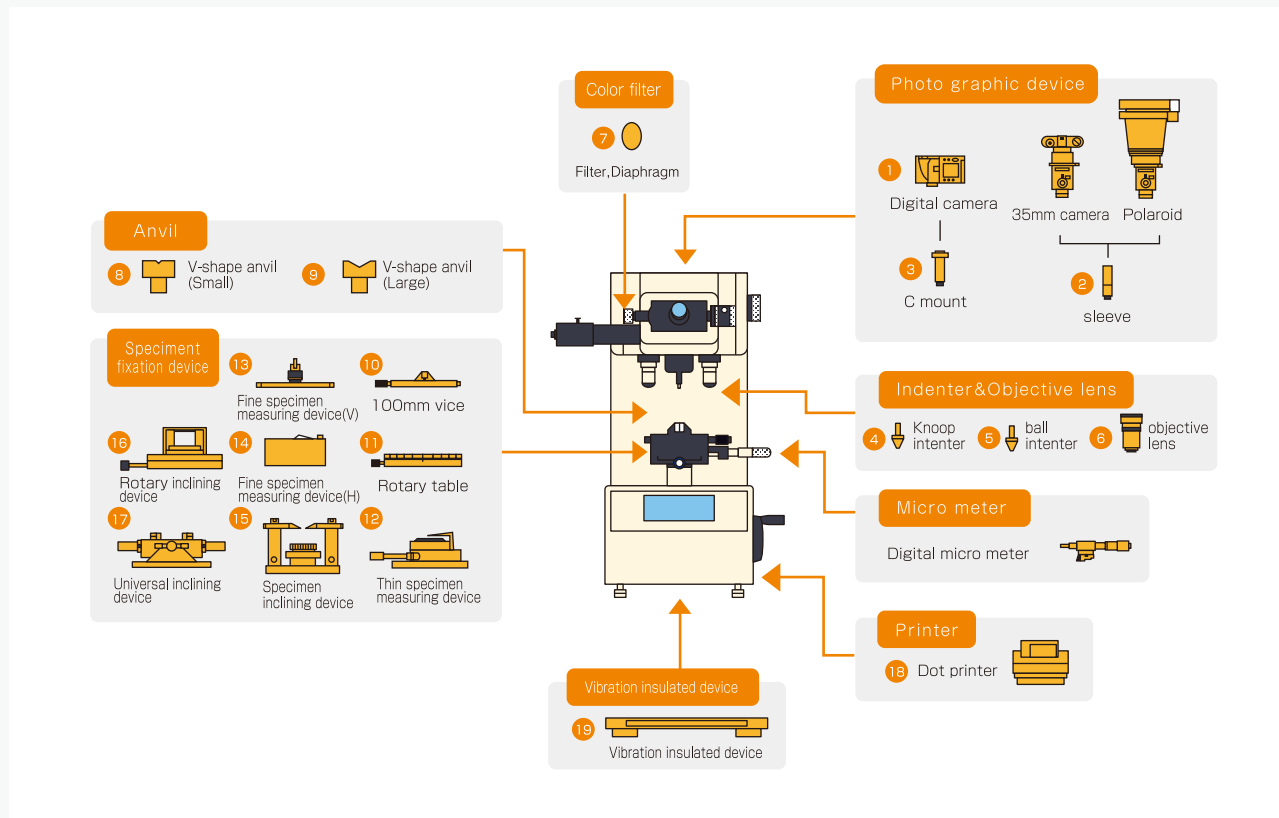

Factory Setting Option

ID Code	Item	Specification	Model	Note
LB	Test Force type	Type B(1~2000gf 12step)	All	Standard:Type A
AP	Test Force change device	Automatic change(Panel operation)	X3,X7	
ID	Indenter	Two simultaneous installation(HV, HK)	All	
T3,T4	Objective lens	T3:3 objective lens / T4:4 objective lens	All	Standard:2 lens
DM	Micrometer	Digital micrometer	X3,X7	Displaying a coordinate value on touch panel & cable accessory

※Specify the above option at the time of the order. An exchange becomes possible only in our company factory later.

Optional Accessories

Code No.	Item	Contents
M203	Photographic device:Digital camera ①	Nikon Microsystem(Digital camera,relay lens,accessory)
M211	Camera sleeve ②	For polaroid camera or 35mm camera.
M212	C mount ③	For digital camera or automatic system.
M002	Knoop indenter(HK) ④	Effectively measures thin material.
M003	Ball indenter(HB) ⑤	For light-load brinell test.(ϕ 1mm cemented carbide steel ball)
M071~075	Objective lens ⑥	100X(M071), 40X(M072), 50X(M080), 20X(M073), 10X(M074), 5X(M075)
M076	Eyepiece	15X
M081	Color filter ⑦	ϕ 20mm yellow,blue,red(standard:green)
M082	Aperture diaphragm ⑦	1mm~6mm(1mm pitch,6 size)
M020	V-shape anvil(Small) ⑧	For measuring the cylindrical surface together with vice. ϕ 2mm~ ϕ 6mm
M021	V-shape anvil(Large) ⑨	For measuring the cylindrical surface together with vice. ϕ 8mm~ ϕ 50mm
M012	Precision vice ⑩	Max. opening:100mm
M013	Rotary table ⑪	360° rotation.This table is usually on the micro test table with precision vice.
M014	Thin specimen measuring device ⑫	Specimen thickness:0.05~5mm
M015	Fine specimen measuring device(V) ⑬	Vertical type.Specimen diameter:0.1~4mm
M016	Fine specimen measuring device(H) ⑭	Horizontal type.Specimen diameter:0.5~4mm
M017	Specimen inclining device ⑮	The measuring surface always shows a horizontal level.Specimen height:5~21mm
M018	Rotary inclining device ⑯	Specimen diameter :1inch, 1 1/4inch, 1 1/2inch select one size as you want
M019	Universal inclining device ⑰	When the specimen is inclined or curved,this device is effective to get the correct level.
CO01	Dot printer ⑱	From CBM-910II hardness tester adding up results to data output.
M171~M175	Vibration insulated device ⑲	On the desk type(Rubber cushion type:M171,Manual air type:M172, Auto air type:M173,Compound mount type:M175),Desk type(M174)
M102	Table for Knoop hardness number	For HK 5gf~50kgf

Standard Accessories

Code No.	Item / Model	MMT-X7	MMT-X3	MMT-X1
MO31	Manual X-Y stage(Built in/Max.movement:25mm/Min scale:0.01mm)		1	
MO11	Precision vice(Max.opening:50mm)		1	
MO61	Standard test block(700HMV0.2)		1	
MO01	Diamond indenter		1	
MO41	Measuring microscope:Electronic type	1		—
MO42	Measuring microscope:Mechanical type	—		1
MO72	Object lens 40×(Built in)		1	
MO74	Object lens 10×(Built in)		1	
M111	Level adjusting leg		4	
M112	Level		1	
MO94	Spare fuse(100~220V5A)		2	
CO31	Power cord(3P 2.5m)		1	
M161	Machine cover		1	
—	Auxiliary tool kit		1	
—	Instruction manual(Basic&Application)		1	
—	Inspection sheet		1	
M101	Table for Vickers hardness number(5gf~50kgf)	—		1

Data processing software

Hardness Data Communication Software(Optional)

HARDCOM SERIES

Testing data are transmitted to Microsoft Excel directly.

Testing data can be managed if software is installed in the personal computer.

(Microsoft Excel is separately necessary.)



Connection method

Hardness meter output(RS232C)-PC input(RS232C or USB)
 *USB serial converters standard attachment·Corresponds to USB2.0

Data processing function

Testing data, test condition, statistics data and graph drawing are equipped.

Measurement position data can be input.

Testing position data are indicated by connecting a digital micro-meter.

(Digital micro-meter is separately necessary.)

Support an exclusive format.

The input part of the testing condition is freely revokable.

Our company will produce it if there is hope by a special form.

Code No. S001 Standard Software

Code No. S002 Software with the position data input function.

Corresponding model:MMT-X3,X7 · VMT-X3,X7 · RMT-1,3

*RMT series does not have the functionality of a data entry position.
 OS:Windows2000,XP,Vista,7 Excel Version:corresponds up to 2010

HARDNESS TEST DATA					
Condition	2005/7/7	Port No.	00-00-101	Material	S45C
Operator	UEES	Pro. No.	5405	Heat	
Item	Sample Test	Lot No.	46000	Other	
Note					



Point	Max.	Min.	R	Ave	Stdev	Upper L	Upper L	Cr	Chk
R	582	582	548	453	19.7	900	900	08	04

Test No.	X	Y	Distance	Load #274	Original Co	Hardness HV	Dist. Scale	Conv. Hardness	Judge	
1	0.1	0	0.1	9907	15.1	19.2	808.0	HV	808.0	OK
2	0.2	0	0.2	9907	15.2	15.3	808.7	HV	808.7	OK
3	0.3	0	0.3	9907	15.6	15.7	747.8	HV	747.8	OK
4	0.4	0	0.4	9907	17.2	17.3	623.5	HV	623.5	OK
5	0.5	0	0.5	9907	17.6	18.2	552.3	HV	552.3	OK
6	0.6	0	0.6	9907	20.1	20.2	456.2	HV	456.2	OK
7	0.7	0	0.7	9907	21.6	21.7	395.7	HV	395.7	OK
8	0.8	0	0.8	9907	22.1	22.0	381.4	HV	381.4	OK
9	0.9	0	0.9	9907	23.5	23.8	334.4	HV	334.4	OK
10	1.0	0	1.0	9907	24.0	24.1	303.8	HV	303.8	OK
11	1.1	0	1.1	9907	24.3	24.6	297.7	HV	297.7	OK
12	1.2	0	1.2	9907	25.1	25.3	260.0	HV	260.0	OK
13	1.3	0	1.3	9907	26.8	26.8	198.8	HV	198.8	OK
14	1.4	0	1.4	9907	26.6	26.4	185.1	HV	185.1	OK
15	1.5	0	1.5	9907	26.9	26.7	158.2	HV	158.2	OK

*Microsoft and Windows are registered trademark by Microsoft USA in USA and other details.

*Contents of this brochure is September 2012. Specifications and appearance may change without notice.



MATSUZAWA MATSUZAWA CO.,LTD

120-10, Aza-Nanamagaridai, Toshima, Kawabe,
 Akita-shi, Akita Pref, 019-2611, Japan

TEL.+81-18-882-4580 FAX.+81-18-882-4584

E-MAIL:support@matsuzawa-ht.com URL:http://www.matsuzawa-ht.com

●Tokyo Office 2-43-1-506, Tagara, Nerima-ku, Tokyo, 179-0073, Japan TEL/FAX.+81-3-3975-9216

●West JAPAN Office 2-9-17, Koinokubo, Nara-shi, Nara Pref, 630-8136, Japan TEL.+81-742-32-5641 FAX.+81-742-34-7772

●Sakae Office